


TASTE AND COLOURS



White




Ivory



Frangipane



Marron glacé



Terracotta



Armor blue



Delft blue



Portuguese blue




Dark blue



Light olive



Green



Chocolate



Provence yellow



Mandarin



Burgundy red



Black



Stainless steel



Anthracite



LES PIANOS GASTRONOMES

SIL • LACANCHE • 21230 ARNAY-LE-DUC • FRANCE • PHONE: 33 (0) 380 903 505 • FAX 33 (0) 380 842 492

www.lacanche.com



LES PIANOS GASTRONOMES

INTRODUCTION

Lacanche range cookers are different to other range cookers, and boast an extraordinary heritage. They take their name from the village of Lacanche, situated deep in the heart of the Burgundian countryside in France. A foundry was established here some 200 years ago, and ever since then range cookers have been manufactured on the site, primarily for use in French commercial kitchens.

The standard colour of a Lacanche range cooker is black. Stainless steel or enamelled colours are available as an option. The control knobs, ends of hand rail, drawer pulls and door handles are made of solid, cast, forged brass. The standard Lacanche trim is brass. They are also available in chrome-plated (mat or gloss), nickel-plated and brushed stainless steel finishes.

Hobs are made of a single piece of pressed 18/10 stainless steel. The various power burners come with electric ignition and flame failure safety device as standard. The pan stands in enamelled cast-iron and burners have been designed for maximum versatility: they accommodate pans and pots ranging from 10 to 40 cm.

The simmer plate available on various models is made of enamelled polished cast-iron. The central ring can be taken off for open-flame cooking. As an alternative to gas burners, some range cookers can be supplied with electric hobs (radiant or induction).

Lacanche range cookers are built with:

- One large 74 L. oven, which accepts 530 x 325 mm plates on all following cookers: Cormatin, Vougeot/ Volnay, Chassagne/Chambertin, Sully, and Fontenay.
- Two 55 L. ovens, which accept 400 x 300 mm plates on Cluny and Chagny cookers.
- One large 74L. oven and one 49 L. side convection oven. The side oven accepts 292 x 400 mm plates on Saulieu/Savigny and Citeaux cookers.

In all cases, oven dishes can be inserted at 3 different heights. The interior of the oven is made of vitrified heavy-duty enamel. It is acid-resistant, easy to clean and provides a smooth surface. The ovens are offered in a choice of gas, static electric or convection electric versions.

Lacanche is maintaining the tradition of bespoke manufacturing. Any project involving specific dimensions or technical features should be transmitted to the Lacanche workshops, where a team of specialists will gladly check all aspects of the project in terms of feasibility, price and delivery time.

NB:

All Lacanche range cookers can be operated in either 230V 1 N~50 Hz or 400 V 3N~50 Hz (unless stated otherwise). The technical specifications comply with professional standards and with the CE norms EN 203.1 and EN 203.2 for gas cookers. The appliances feature the CE seal of approval. The specifications for gas burners are made for natural gas (G20-20 mb). LPG-compatible versions are available on request.


IMPORTANT:

The CE norms prescribe maximum operating temperatures, as measured on the back and side walls above the cooking table. Accordingly, the range cooker must always be placed at a certain distance from the walls. This can be achieved by using the DS Back Strip or the LCR stainless steel backsplash (details on page 30).

All necessary arrangements must be made at installation stage in order to prevent any flammable piece of furniture or decoration item from coming close to the range cooker at any time. If this should not prove possible, sturdy fire-proof insulating panels must be installed around the cooker. Please take all applicable fire safety regulations into account when installing a Lacanche range cooker!


This document does not form the basis of a contract. All technical specifications and product descriptions are subject to change without prior notice. This applies in particular to any change made by SIL (Société Industrielle de Lacanche) to the materials, manufacturing procedures, dimensions or performance data.

2	INTRODUCTION
4 5	CORMATIN
6 7	RULLY
8 9	CLUNY 1000
10 11	CLUNY 1400 D
12 13	CLUNY 1400 G
14 15	CLUNY 1800
16 17	CHAGNY
18 19	VOUGEOT & VOLNAY
20 21	CHASSAGNE & CHAMBERTIN
22 23	SAULIEU & SAVIGNY
24 25	SULLY
26 27	FONTENAY
28 29	CITEAUX
30 31 32	ACCESSORIES AND OPTIONAL EQUIPMENT
33 34 35	EXTRACTION




W 700 x H 860 x D 650mm **CE**


- **Standard finish:**
 - Black enamel
 - Trim: brass
- **Options:**
 - Enamelled colours and stainless steel: LOC 701
 - Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)
 - Stainless steel plinth: LRH 701 (increases height to 900/910 mm)



- CLASSIC HOB**
3 BURNERS
- 1 x 5 kW burner
 - 1 x 3 kW burner
 - 1 x 1.5 kW burner
 - Electric ignition and flame failure safety systems



- CLASSIC HOB**
4 BURNERS
- 1 x 4 kW burner
 - 2 x 3 kW burners
 - 1 x 1.5 kW burner
 - Electric ignition and flame failure safety systems



- TRADITIONAL HOB**
2 BURNERS AND SIMMER PLATE
- 1 cast iron simmer plate over 5 kW burner
 - 1 x 3 kW burner
 - 1 x 1.5 kW burner
 - Electric ignition and flame failure safety systems


Ovens:	interior dimensions (mm)
Static oven:	W 530 x H 305 x D 455
Convection elec. oven:	W 530 x H 305 x D 405

1 x 4 kW gas oven.
1 x 3.1 kW static elec. oven with grill.
1 x 3.4 kW convection elec. oven with grill.

Reference
LG 731 G
LG 731 E
LG 731 CT

Reference
LG 741 G
LG 741 E
LG 741 CT

Reference
LCF 731 G
LCF 731 E
LCF 731 CT




RADIANT HOB 4 RINGS

- Vitroceramic hob
- 2 x Ø 210 mm @2100 W rings
- 2 x Ø 140/210 mm double rings, @1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 741 E (1)

LVTR 741 CT (1)



INDUCTION HOB 3 RINGS


- Vitroceramic hob
- 1 ring Ø 145 mm @1400 W, booster 1800 W
- 1 ring Ø 200 mm @ 1850 W, booster 1800 W
- 1 ring Ø 270 mm @ 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference

LVI 731 E


LVI 731 CT

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code: LAC 230 V)




W 700 x H 900 x D 650mm **CE**


- **Standard finish:**
 - Black enamel
 - Trim: brass
- **Options:**
 - Enamelled colours and stainless steel: LOC 702
 - Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)



- CLASSIC HOB**
3 BURNERS
- 1 x 5 kW burner
 - 1 x 3 kW burner
 - 1 x 1.5 kW burner
 - Electric ignition and flame failure safety systems



- CLASSIC HOB**
4 BURNERS
- 1 x 4 kW burner
 - 2 x 3 kW burners
 - 1 x 1.5 kW burner
 - Electric ignition and flame failure safety systems



- TRADITIONAL HOB**
2 BURNERS AND SIMMER PLATE
- 1 cast iron simmer plate over 5 kW burner
 - 1 x 3 kW burner
 - 1 x 1.5 kW burner
 - Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 530 x H 305 x D 455
Convection elec. oven:	W 530 x H 305 x D 405
Grill oven:	W 530 x H 140 x D 450

- 1 x 3.1 kW static elec. oven with grill and 1 x 26 L/2.85 kW static elec. oven with grill
- 1 x 3.4 kW conv. elec. oven with grill and 1 x 26 L/2.85 kW static elec. oven with grill


Reference
LG 732 E
LG 732 CT

Reference
LG 742 E
LG 742 CT

Reference
LCF 732 E
LCF 732 CT



CLUNY 1000

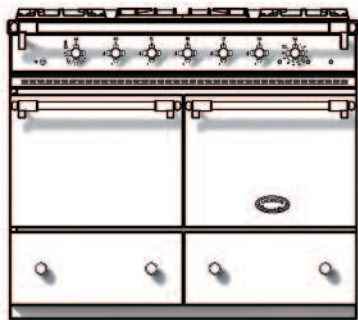

W1000 x H 860 x D 650 mm




• **Standard finish:**

- Black enamel
- Trim: brass

• **Options:**


- Enamelled colours and stainless steel: LOC 1052
- Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)
- Stainless steel plinth (increases height to 900/910 mm): LRH 1001

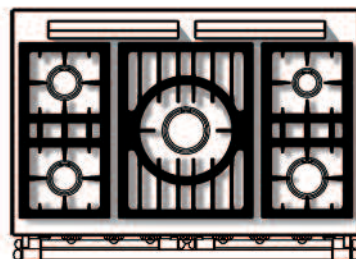

CLASSIC HOB

5 BURNERS

- 1 x 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

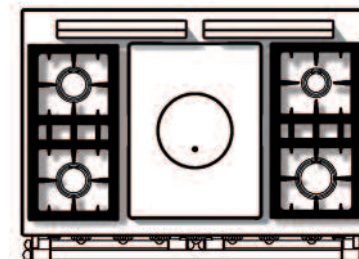

TRADITIONAL HOB

4 BURNERS AND SIMMER PLATE

- 1 simmer plate above 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 400 x H 305 x D 455
Convection oven:	W 400 x H 305 x D 405

2 x 3.5 kW gas ovens.

1 x 3.5 kW gas oven and 1 x 2.5 kW static elec. oven with grill.

2 x 2.5 kW static elec. ovens with grills.

1 x 3.5 kW gas oven
and 1 x 2.65 kW convection elec. oven with grill.

1 x 2.5 kW static elec. oven with grill
and 1 x 2.65 kW convection elec. oven with grill.

Reference

LG 1052 G

LG 1052 GE

LG 1052 E

LG 1052 GCT

LG 1052 ECT

Reference


LCF 1052 G

LCF 1052 GE

LCF 1052 E

LCF 1052 GCT

LCF 1052 ECT

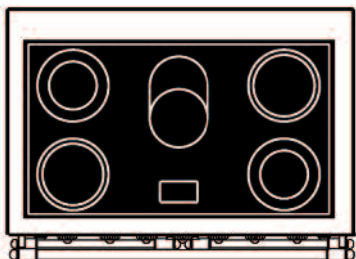


RADIANT HOB 5 RINGS

- Vitroceramic hob
- 2 x Ø 210 mm @2100 W rings
- 2 x Ø 140/210 mm double rings, @1000 / 2100 W
- 1 x oval ring 170 x 265 mm, @1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1052 E (1)

LVTR 1052 ECT (1)

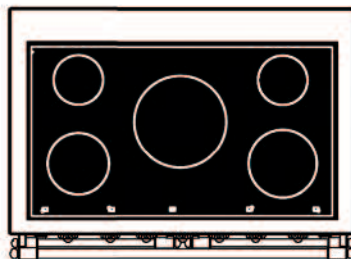

INDUCTION HOB 5 RINGS

- Vitroceramic hob
- 1 left ring Ø 145 mm @1400 W, booster 1800 W
- 1 left ring Ø 180 mm @ 1850 W, booster 2500 W
- 1 right ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 right ring Ø 200 mm @ 1850 W, booster 2500 W
- 1 central ring Ø 270 mm @ 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator


Reference

LVI 1052 E (1)

LVI 1052 ECT (1)

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code: LAC 230 V)

CLUNY 1400 D

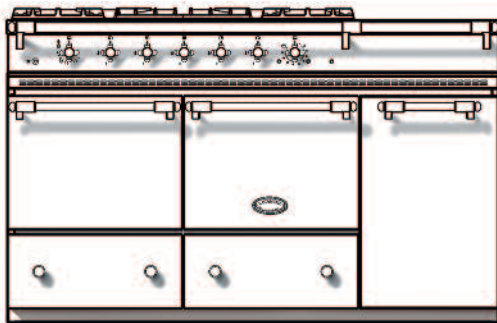

W1405 x H 860 x D 650 mm



• Standard finish:

- Black enamel


- Trim: brass

• Options:

- Enamelled colours and stainless steel: LOC 1401

- Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)


- Stainless steel plinth (increases height to 900/910 mm): LRH 1400

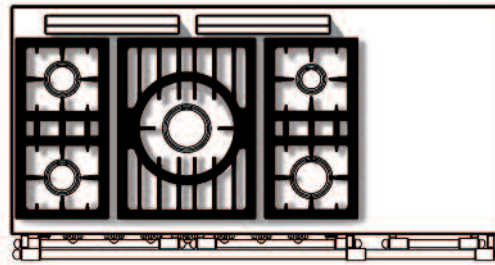

CLASSIC HOB

5 BURNERS

- 1 x 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

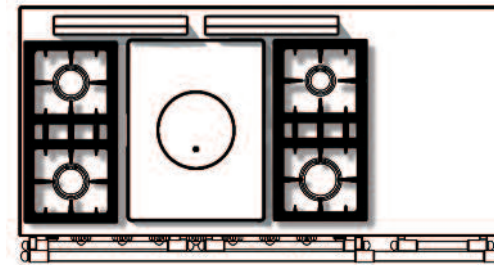

TRADITIONAL HOB

4 BURNERS AND SIMMER PLATE

- 1 cast iron simmer plate over 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 400 x H 305 x D 455
Convection oven:	W 400 x H 305 x D 405
Simmer oven:	W 328 x H 506 x D 533

Reference


Reference

2 x 3.5 kW gas ovens.
1 x 3.5 kW gas oven and 1 x 2.5 kW static elec. oven with grill.
2 x 2.5 kW static elec. ovens with grills.
1 x 3.5 kW gas oven and 1 x 2.65 kW convection elec. oven with grill.
1 x 2.5 kW static elec. oven with grill and 1 x 2.65 kW convection elec. oven with grill.
Optional extra, on right hand side only: Simmer oven (see description p.29).

LG 1452 G-D
LG 1452 GE-D
LG 1452 E-D
LG 1452 GCT-D
LG 1452 ECT-D
ETL 001


LCF 1452 G-D
LCF 1452 GE-D
LCF 1452 E-D
LCF 1452 GCT-D
LCF 1452 ECT-D
ETL 001

30% deposit to be paid on order registration.
This appliance can neither be returned nor exchanged.

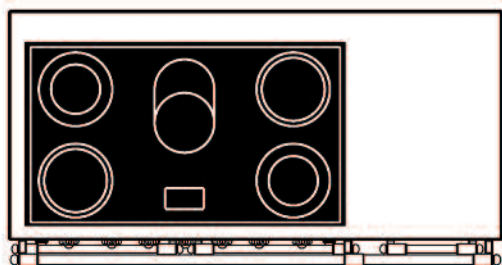

RADIANT HOB
5 RINGS

- Vitroceramic hob
- 2 x Ø 210 mm @2100 W rings
- 2 x Ø 140/210 mm double rings, @1000 / 2100 W
- 1 x oval ring 170 x 265 mm, @1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

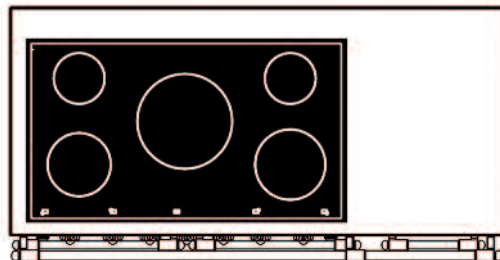

INDUCTION HOB
5 RINGS

- Vitroceramic hob
- 1 left ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 left ring Ø 180 mm @ 1850 W, booster 2500 W
- 1 right ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 right ring Ø 200 mm @ 1850 W, booster 2500 W
- 1 central ring Ø 270 mm @ 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1452 E-D (1)

LVTR 1452 ECT-D (1)

ETL 001

Reference

LVI 1452 E-D (1)


LVI 1452 ECT-D (1)

ETL 001


Any of the hob options illustrated below may be integrated (as optional extra) on the right hand side of the hob.



1 x 5 kW
burner



2 x 3 kW
burners



2 x 4 kW
burners




2 radiant rings,
1 x Ø 210 mm
@2100 W, 1
Ø 140/210 mm
@1000/2100 W

LAG 010 UR


LAG 020 R

LAG 024 R


LAE 020 VTR




2 induction rings
1 x Ø 145 mm
@ 1400 W,
booster 1800 W,
1 x Ø 200 mm
@ 1850 W,
booster 2500 W



Electric plancha
2.2 kW



Electric griddle
3.5 kW



Gas-grill
4 kW

LAE 020 I


LAE 010 TPK

LAE 010 GE

LAG 010 CKG



Multi cooker
Steamer
Pasta Boiler
Bain Marie
3.5 kW



Electric fryer
6 L - 3.3 kW


LAE 010 CV (2) (3) LAE 413 FR (3)

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code: LAC 230 V)

(2) Requires water supply and connection to waste.


(3) Cannot be fitted over simmer oven.

CLUNY 1400 G

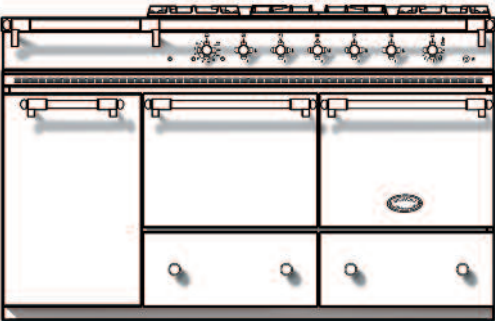


W1405 x H 860 x D 650 mm

- **Standard finish:**
 - Black enamel
 - Trim: brass
- **Options:**
 - Enamelled colours and stainless steel: LOC 1401
 - Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)
 - Stainless steel plinth (increases height to 900/910 mm): LRH 1400

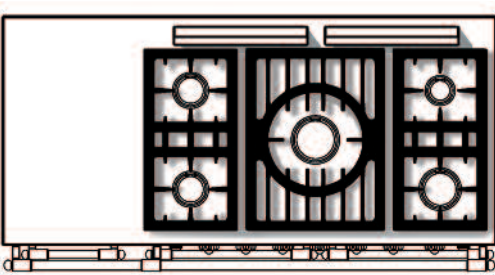

CLASSIC HOB
5 BURNERS

- 1 x 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

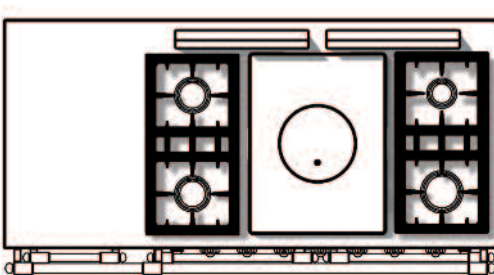

TRADITIONAL HOB
4 BURNERS AND SIMMER PLATE

- 1 cast iron simmer plate over 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 400 x H 305 x D 455
Convection oven:	W 400 x H 305 x D 405
Simmer oven:	W 328 x H 506 x D 533

Reference

Reference

2 x 3.5 kW gas ovens.

LG 1452 G-G

LCF 1452 GG

1 x 3.5 kW gas oven
and 1 x 2.5 kW static elec. oven with grill.

LG 1452 GE-G

LCF 1452 GEG

2 x 2.5 kW static elec. ovens with grills.

LG 1452 E-G

LCF 1452 EG

1 x 3.5 kW gas oven
and 1 x 2.65 kW convection elec. oven with grill.

LG 1452 GCT-G

LCF 1452 GCTG

1 x 2.5 kW static elec. oven with grill
and 1 x 2.65 kW convection elec. oven with grill.

LG 1452 ECT-G

LCF 1452 ECTG


Optional extra, on left hand side only:

Simmer oven (see description p.29).

ETL 001


ETL 001

30% deposit to be paid on order registration.
This appliance can neither be returned nor exchanged.

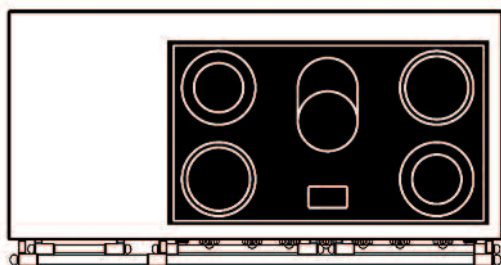

RADIANT HOB
5 RINGS

- Vitroceramic hob
- 2 x Ø 210 mm @2100 W rings
- 2 x Ø 140/210 mm double rings, @1000 / 2100 W
- 1 x oval ring 170 x 265 mm, @1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

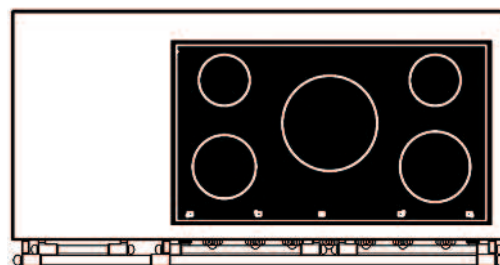

INDUCTION HOB
5 RINGS

- Vitroceramic hob
- 1 left ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 left ring Ø 180 mm @ 1850 W, booster 2500 W
- 1 right ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 right ring Ø 200 mm @ 1850 W, booster 2500 W
- 1 central ring Ø 270 mm @ 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1452 E-G (1)

LVTR 1452 ECT-G (1)

ETL 001

Reference

LVI 1452 E-G (1)


LVI 1452 ECT-G (1)

ETL 001


Any of the hob options illustrated below may be integrated (as optional extra) on the right hand side of the hob.



1 x 5 kW
burner



2 x 3 kW
burners



2 x 4 kW
burners




2 radiant rings,
1 x Ø 210 mm
@2100 W, 1
Ø 140/210 mm
@1000/2100 W

LAG 010 UR


LAG 020 R

LAG 024 R


LAE 020 VTR




2 induction rings
1 x Ø 145 mm
@ 1400 W,
booster 1800 W,
1 x Ø 200 mm
@ 1850 W,
booster 2500 W



Electric plancha
2.2 kW



Electric griddle
3.5 kW



Gas-grill
4 kW

LAE 020 I


LAE 010 TPK

LAE 010 GE

LAG 010 CKG



Multi cooker
Steamer
Pasta Boiler
Bain Marie
3.5 kW



Electric fryer
6 L - 3.3 kW

LAE 010 CV (2) (3)


LAE 413 FR (3)

(1) Electric installation: 400v 3N + T~50Hz.

(2) Requires water supply and outlet connection to waste waters.

(3) Cannot be installed in top of simmer oven option.

CLUNY 1800

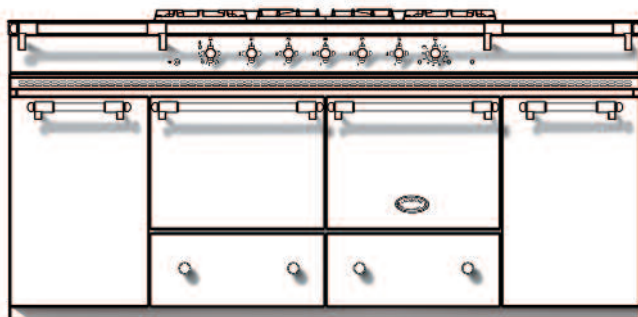

W1805 x H 860 x D 650 mm



• Standard finish:

- Black enamel


- Trim: brass

• Options:

- Enamelled colours and stainless steel: LOC 1852

- Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)


- Stainless steel plinth (increases height to 900/910 mm): LRH 1800

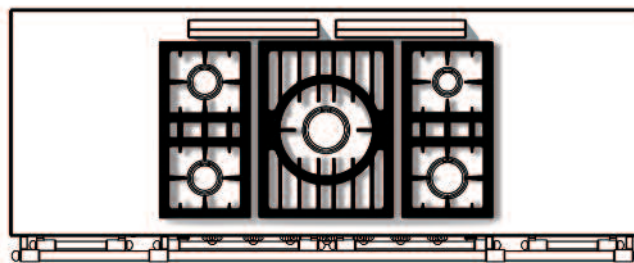

CLASSIC HOB

5 BURNERS

- 1 x 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

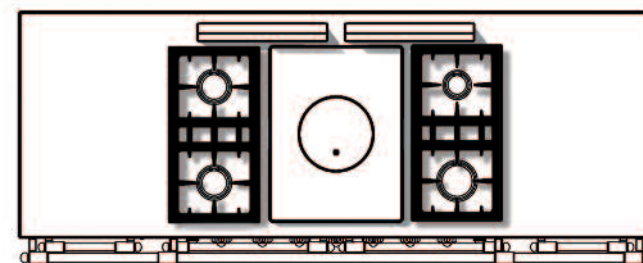

TRADITIONAL HOB

4 BURNERS AND SIMMER PLATE

- 1 cast iron simmer plate over 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 400 x H 305 x D 455
Convection oven:	W 400 x H 305 x D 405
Simmer oven:	W 328 x H 506 x D 533

Reference

Reference

2 x 3.5 kW gas ovens.

LG 1852 GG

LCF 1852 GG

1 x 3.5 kW gas oven

LG 1852 GEG

LCF 1852 GEG

and 1 x 2.5 kW static elec. oven with grill.

2 x 2.5 kW static elec. ovens with grills

LG 1852 EG

LCF 1852 EG

1 x 3.5 kW gas oven

LG 1852 GCTG

LCF 1852 GCTG

and 1 x 2.65 kW convection elec. oven with grill.

1 x 2.5 kW static elec. oven with grill

LG 1452 ECTG

LCF 1852 ECTG

and 1 x 2.65 kW convection elec. oven with grill.

Optional extra: on right or left hand side


(must be specified when ordering):

Simmer oven (see description p.29).

ETL 001


ETL 001

30% deposit to be paid on order registration.
This appliance can neither be returned nor exchanged.

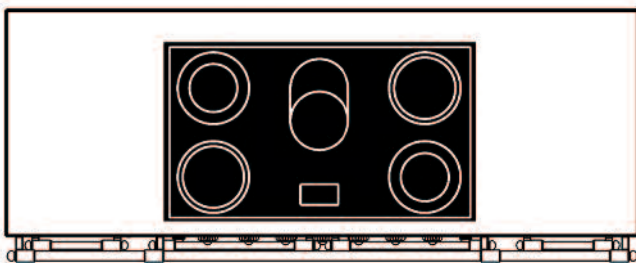

RADIANT HOB
5 RINGS

- Vitroceramic hob
- 2 x Ø 210 mm @2100 W rings
- 2 x Ø 140/210 mm double rings, @1000 / 2100 W
- 1 x oval ring 170 x 265 mm, @1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

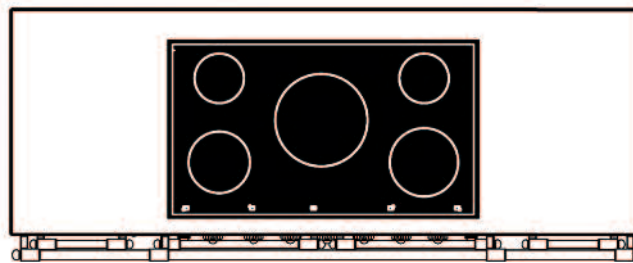

INDUCTION HOB
5 RINGS

- Vitroceramic hob
- 1 left ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 left ring Ø 180 mm @ 1850 W, booster 2500 W
- 1 right ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 right ring Ø 200 mm @ 1850 W, booster 2500 W
- 1 central ring Ø 270 mm @ 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1852 EG (1)

LVTR 1852 ECTG (1)

ETL 001

Reference

LVI 1852 EG (1)

LVI 1852 ECTG (1)


ETL 001

- (1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code: LAC 230 V)
- (2) Requires water supply and connection to waste.
- (3) Cannot be fitted over simmer oven.


Any of the hob options illustrated below may be integrated (as optional extra) on the left and right hand sides of the hob (position must be specified when ordering).



1 x 5 kW
burner



2 x 3 kW
burners



2 x 4 kW
burners




2 radiant rings,
1 x Ø 210 mm
@2100 W, 1
Ø 140/210 mm
@1000/2100 W

LAG 010 UR


LAG 020 R

LAG 024 R


LAE 020 VTR




2 induction rings
1 x Ø 145 mm
@ 1400 W,
booster 1800 W,
1 x Ø 200 mm
@ 1850 W,
booster 2500 W



Electric plancha
2.2 kW



Electric griddle
3.5 kW



Gas-grill
4 kW

LAE 020 I


LAE 010 TPK

LAE 010 GE

LAG 010 CKG




Multi cooker
Steamer
Pasta Boiler
Bain Marie
3.5 kW




Electric fryer
6 L - 3.3 kW

LAE 010 CV (2) (3) LAE 413 FR (3)

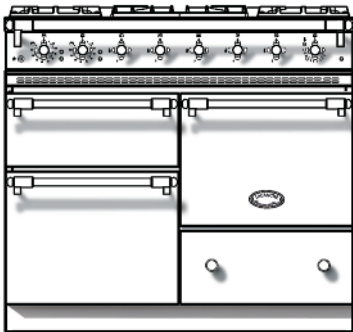


L. 1000 x H. 914 x P. 650 m **CE**

- **Standard finish:**
 - Black enamel
 - Trim: brass
- **Options:**
 - Enamelled colours and stainless steel: LOC 1052
 - Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)

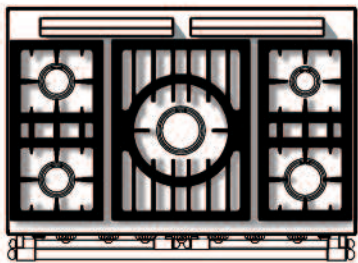

CLASSIC HOB
5 BURNERS

- 1 x 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

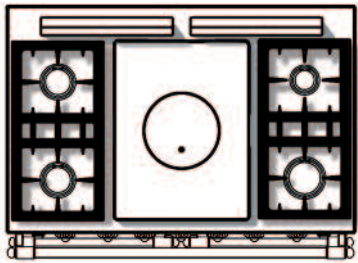

TRADITIONAL HOB
4 BURNERS AND SIMMER PLATE

- 1 cast iron simmer plate over 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 400 x H 305 x D 455
Convection oven:	W 400 x H 305 x D 405
Grill oven:	W 400 x H 145 x D 440

Reference

Reference

1 x 3.5 kW gas oven, 1 x 2.5 kW static elec. oven with grill
and 1 x 2.4 kW static elec. oven with grill.

LG 1053 EG

LCF 1053 EG

2 x 2.5 kW static elec. ovens with grills
and 1 x 2.4 kW static elec. oven with grill.

LG 1053 E

LCF 1053 E

1 x 3.5 kW gas oven, 1 x 2.65 kW convection elec. oven with grill
and 1 x 2.4 kW static elec. oven with grill.


LG 1053 CTG

LCF 1053 CTG

1 x 2.5 kW static elec. oven with grill, 1 x 2.65 kW convection
elec. oven with grill and 1 x 2.4 kW static elec. oven with grill.

LG 1053 ECT

LCF 1053 ECT

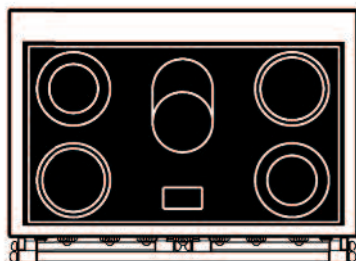


**RADIANT HOB
5 RINGS**

- Vitroceramic hob
- 2 x Ø 210 mm @2100 W rings
- 2 x Ø 140/210 mm double rings,
@1000 / 2100 W
- 1 x oval ring 170 x 265 mm, @1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1053 E (1)

LVTR 1053 ECT (1)

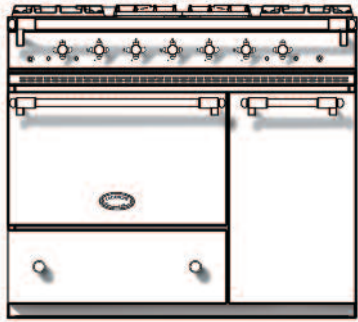

Vougeot

W 1000 x H 860 x D 650 mm **CE**

• **Standard finish:**

- Black enamel


- Trim: brass

• **Options:**

- Enamelled colours and stainless steel: LOC 1051


- Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)

- Stainless steel plinth (increases height to 900/910 mm): LRH 1001

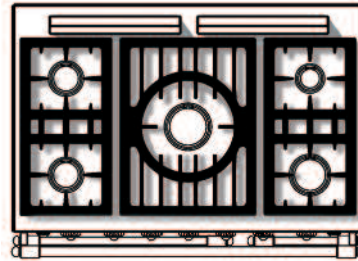

**CLASSIC HOB
5 BURNERS**

- 1 x 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

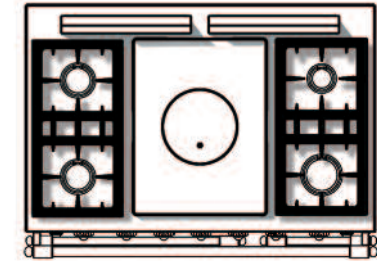

**TRADITIONAL HOB
4 BURNERS AND SIMMER PLATE**

- 1 cast iron simmer plate over 5 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- 1 x 4 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 530 x H 305 x D 455
Convection oven:	W 530 x H 305 x D 405

Reference

Reference

1 x 4 kW gas oven.

LG 1051 G

LCF 1051 G

1 x 3.1 kW static elec. oven with grill.

LG 1051 E

LCF 1051 E

1 x 3.4 kW convection elec. oven with grill.

LG 1051 CT


LCF 1051 CT

Optional extra:


Simmer oven (see description p.29).

ETL 001

ETL 001

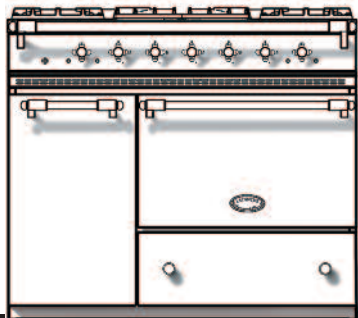

Volnay

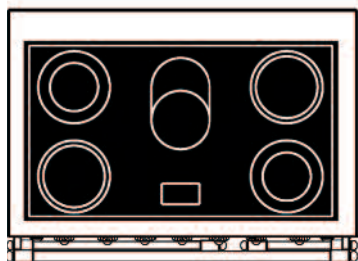

RADIANT HOB

5 RINGS


- Vitroceramic hob
- 2 x Ø 210 mm @2100 W rings
- 2 x Ø 140/210 mm double rings, @1000 / 2100 W
- 1 x oval ring 170 x 265 mm, @1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1051 E (1)

LVTR 1051 CT (1)

ETL 001

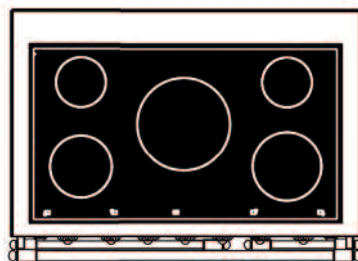

INDUCTION HOB

5 RINGS

- Vitroceramic hob
- 1 left ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 left ring Ø 180 mm @ 1850 W, booster 2500 W
- 1 right ring Ø 145 mm @ 1400 W, booster 1800 W
- 1 right ring Ø 200 mm @ 1850 W, booster 2500 W
- 1 central ring Ø 270 mm @ 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference


LVI 1051 E (1)

LVI 1051 CT (1)

ETL 001

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code: LAC 230 V)

CHASSAGNE & CHAMBERTIN

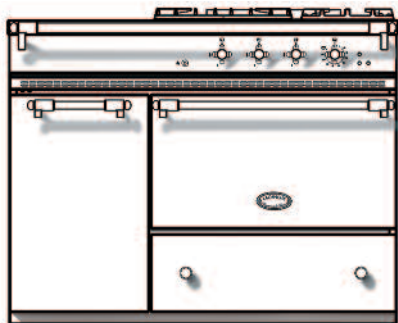

Chassagne

W 1105 x H 860 x D 650 mm




• **Standard finish:**

- Black enamel
- Trim: brass


• **Options:**

- Enamelled colours and stainless steel: LOC 1100
- Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)
- Stainless steel plinth (increases height to 900/910 mm): LRH 1101

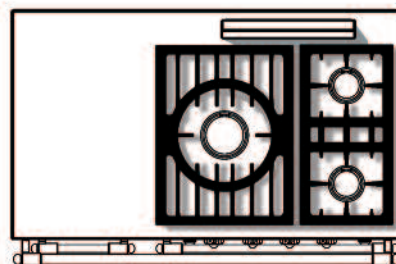


**CLASSIC HOB
3 BURNERS**

- 1 x 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition system and flame failure safety device on all gas burners

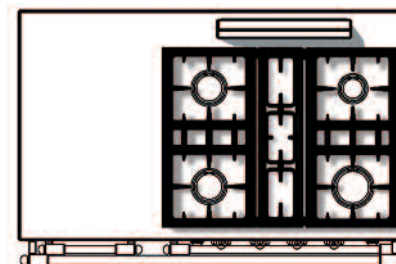

**CLASSIC HOB
4 BURNERS**

- 1 x 4 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

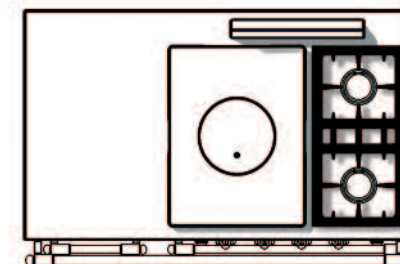

**TRADITIONAL HOB
2 BURNERS AND SIMMER PLATE**

- 1 cast iron simmer plate over 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

Ovens: interior dimensions (mm)
Static oven: W 530 x H 305 x D 455
Convection elec. oven : W 530 x H 305 x D 405

Reference

Reference

Reference

1 x 4 kW gas oven.

LG 1131 G

LG 1141 G

LCF 1131 G

1 x 3.1 kW static elec. oven with grill.

LG 1131 E

LG 1141 E

LCF 1131 E

1 x 3.4 kW convection elec. oven with grill.

LG 1131 CT

LG 1141 CT

LCF 1131 CT


Optional extra:

Simmer oven (see description p.29).

ETL 001


ETL 001

ETL 001

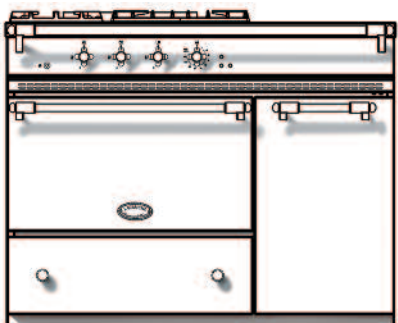


Chambertin

30% deposit to be paid on order registration.
 This appliance can neither be returned nor exchanged.

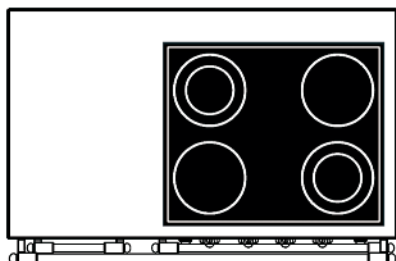

RADIANT HOB 4 RINGS

- Vitroceramic hob
- 2 x 2100 W rings Ø 210 mm
- 2 x double rings Ø 140/210, 1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

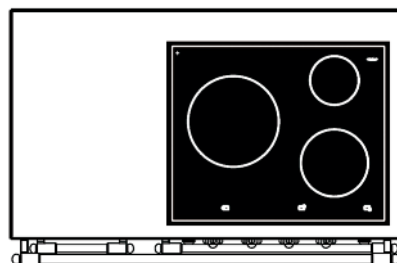

INDUCTION HOB 3 RINGS

- Vitroceramic hob, induction rings
- 1 ring Ø 145 mm of 1400 W, booster 1800 W
- 1 ring Ø 200 mm of 1850 W, booster 1800 W
- 1 ring Ø 270 mm of 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1141 E (1)

LVTR 1141 CT (1)

ETL 001

Reference

LVI 1131 E (1)


LVI 1131 CT (1)

ETL 001


Any of the hob options illustrated below may be integrated (as optional extra) on the left hand side (Chassagne) or the right hand side (Chambertin) of the hob.



1 x 5 kW
burner



2 x 3 kW
burners



2 x 4 kW
burners




2 radiant rings,
1 x Ø 210 mm
@ 2100 W, 1
Ø 140/210 mm
@ 1000/2100 W

LAG 010 UR


LAG 020 R

LAG 024 R

LAE 020 VTR (2)




2 induction rings
1 x Ø 145 mm
@ 1400 W,
booster 1800 W,
1 x Ø 200 mm
@ 1850 W,
booster 2500 W



Electric plancha
2.2 kW



Electric griddle
3.5 kW



Gas-grill
4 kW

LAE 020 I (2)


LAE 010 TPK

LAE 010 GE

LAG 010 CKG



Multi cooker
Steamer
Pasta Boiler
Bain Marie
3.5 kW



Electric fryer
6 L - 3.3 kW


LAE 010 CV (3) (4) LAE 413 FR (3)

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code : LAC 230 V).

(2) Cannot be fitted next to simmer plate.

(3) Cannot be fitted over simmer oven.

(4) Requires water supply and connection to waste.

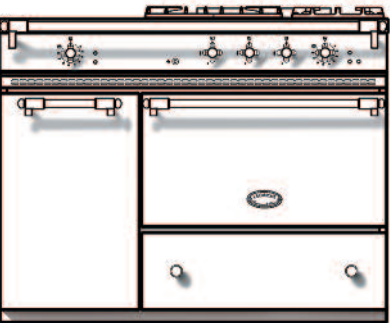

Saulieu

W 1105 x H 860 x D 650 mm

• **Standard finish:**

- Black enamel


- Trim: brass

• **Options:**

- Enamelled colours and stainless steel: LOC 1100


- Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)

- Stainless steel plinth (increases height to 900/910 mm): LRH 1101

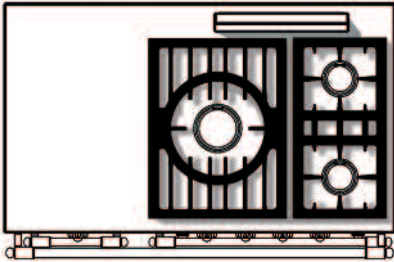


CLASSIC HOB
3 BURNERS

- 1 x 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

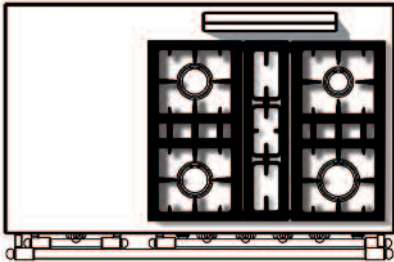

CLASSIC HOB
4 BURNERS

- 1 x 4 kW burner
- 2 x 3 kW burners
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

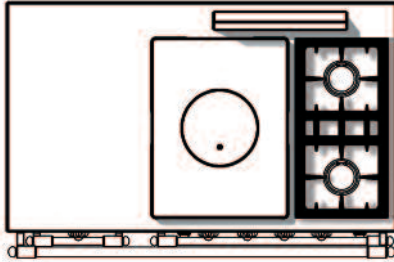

TRADITIONAL HOB
2 BURNERS AND SIMMER PLATE

- 1 cast iron simmer plate over 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 530 x H 305 x D 455
Convection elec. oven :	W 530 x H 305 x D 405
Vertical conv. elec. oven :	W 305 x H 400 x D 405

1 x 4 kW gas oven and 1 x 2.65 kW (vertical) convection electric oven with grill.
1 x 3.1 kW static elec. oven with grill and 1 x 2.65 kW (vertical) convection electric oven with grill.
1 x 3.4 kW convection elec. oven with grill and 1 x 2.65 kW (vertical) convection electric oven with grill.

Reference


LG 1132 G
LG 1132 E
LG 1132 CT

Reference


LG 1142 G
LG 1142 E
LG 1142 CT

Reference

LCF 1132 G
LCF 1132 E
LCF 1132 CT

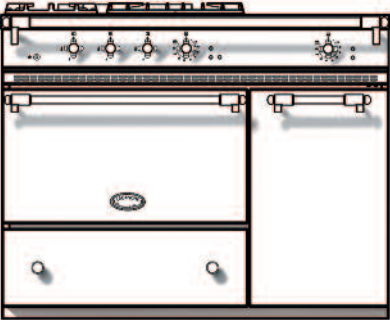


Savigny

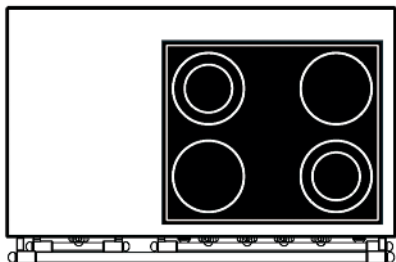

RADIANT HOB
4 RINGS

- Vitroceramic hob
- 2 x 2100 W rings Ø 210 mm
- 2 x double rings Ø 140/210, 1000/2100 W
- Rotating control power switch
- Residual heat indicator

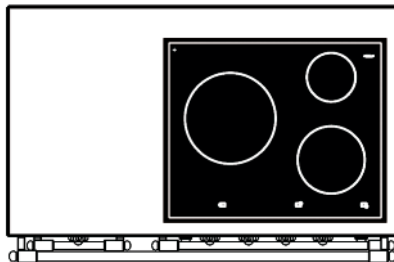

INDUCTION HOB
3 RINGS

- Vitroceramic hob, induction rings
- 1 ring Ø 145 mm of 1400 W, booster 1800 W
- 1 ring Ø 200 mm of 1850 W, booster 1800 W
- 1 ring Ø 270 mm of 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1142 E (1)

LVTR 1142 CT (1)

Reference


LVI 1132 E (1)

LVI 1132 CT (1)


Any of the hob options illustrated below may be integrated (as optional extra) on the left hand side (Saulieu) or the right hand side (Savigny) of the hob.



1 x 5 kW
burner



2 x 3 kW
burners



2 x 4 kW
burners




2 radiant rings,
1 x Ø 210 mm
@ 2100 W, 1
Ø 140/210 mm
@ 1000/2100 W

LAG 010 UR

LAG 020 R


LAG 024 R

LAE 020 VTR (2)



2 induction rings
1 x Ø 145 mm
@ 1400 W,
booster 1800 W,
1 x Ø 200 mm
@ 1850 W,
booster 2500 W

LAE 020 I (2)




Electric plancha
2.2 kW

LAE 010 TPK

30% deposit to be paid on order registration.
This appliance can neither be returned nor
exchanged.

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V
single phase 50 Hz. (Code : LAC 230 V).

(2) Cannot be fitted next to simmer plate.

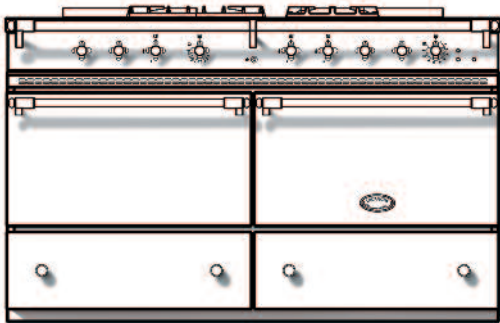


W 1405 x H 860 x D 650 mm

• **Standard finish:**

- Black enamel
- Trim: brass


• **Options:**

- Enamelled colours and stainless steel: LOC 1400
- Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)
- Stainless steel plinth (increases height to 900/910 mm): LRH 1401

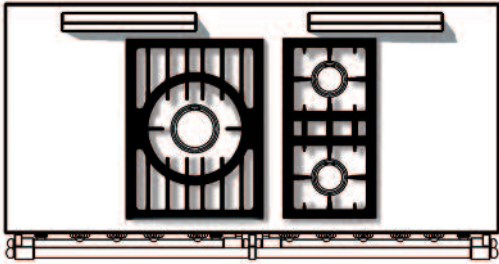

CLASSIC HOB
3 BURNERS

- 1 x 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

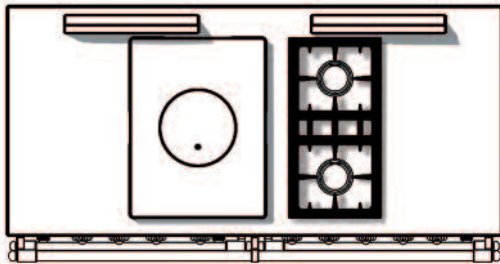

TRADITIONAL HOB
2 BURNERS AND SIMMER PLATE

- 1 cast iron simmer plate over 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 530 x H 305 x D 455
Convection elec. oven :	W 530 x H 305 x D 405

2 x 4 kW gas ovens.
1 x 4 kW gas oven, 1 x 3.1 kW static elec. oven with grill.
2 x 3.1 kW static elec. oven with grills.
1 x 4 kW gas oven, 1 x 3.4 kW convection elec. oven with grill.
1 x 3.1 kW static elec. oven with grill
and 1 x 3.4 kW convection elec. oven with grill.


Reference

LG 1432 G
LG 1432 GE
LG 1432 E
LG 1432 GCT
LG 1432 ECT

Reference

LCF 1432 G
LCF 1432 GE
LCF 1432 E
LCF 1432 GCT
LCF 1432 ECT

30% deposit to be paid on order registration.
This appliance can neither be returned nor
exchanged.

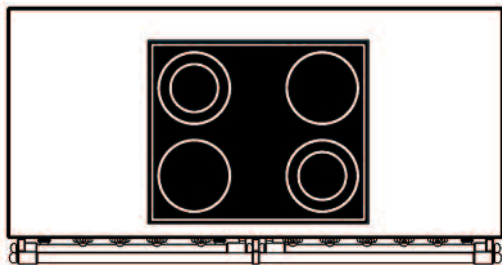


RADIANT HOB
4 RINGS

- Vitroceramic hob
- 2 x 2100 W rings Ø 210 mm
- 2 x double rings Ø 140/210, 1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1442 E (1)

LVTR 1442 ECT (1)

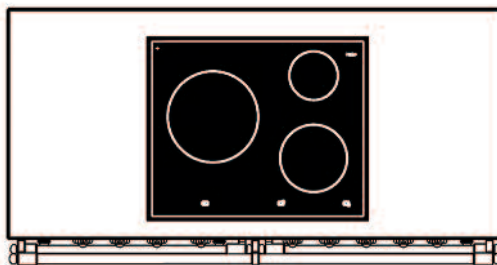

INDUCTION HOB
3 RINGS

- Vitroceramic hob, induction rings
- 1 ring Ø 145 mm of 1400 W, booster 1800 W
- 1 ring Ø 200 mm of 1850 W, booster 1800 W
- 1 ring Ø 270 mm of 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference


LVI 1432 E (1)

LVI 1432 ECT (1)


Any of the hob options illustrated below may be integrated (as optional extra) on the left hand side or right hand side of the hob.



1 x 5 kW
burner



2 x 3 kW
burners



2 x 4 kW
burners




2 radiant rings,
1 x Ø 210 mm
@ 2100 W, 1
Ø 140/210 mm
@ 1000/2100 W

LAG 010 UR (3)

LAG 020 R (4)


LAG 024 R (4)

LAE 020 VTR (2)



2 induction rings
1 x Ø 145 mm
@ 1400 W,
booster 1800 W,
1 x Ø 200 mm
@ 1850 W,
booster 2500 W

LAE 020 I (2)



Electric plancha
2.2 kW


LAE 010 TPK

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code: LAC 230 V).

(2) Can only be fitted over an electric oven (static or convection).

(3) Can only be fitted next to two gas burners.


(4) Can only be fitted next to gas hobs.

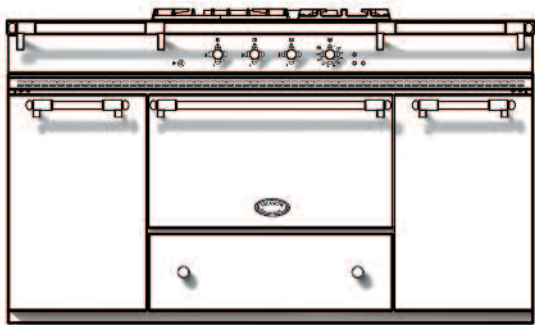

W 1505 x H 860 x D 650 mm




- **Standard finish:**
 - Black enamel
 - Trim: brass
- **Options:**
 - Enamelled colours and stainless steel: LOC 1500l
 - Trim: Chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)
 - Stainless steel plinth (increases height to 900/910 mm): LRH 1501

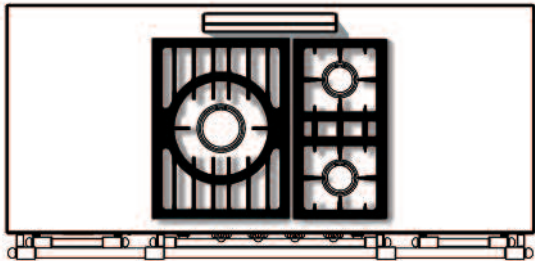

CLASSIC HOB
3 BURNERS

- 1 x 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

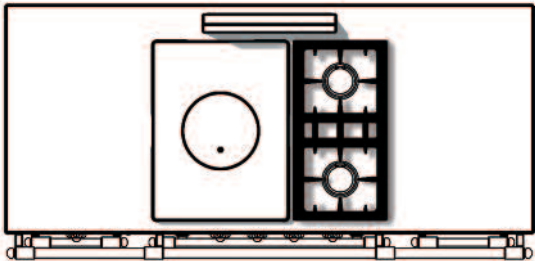

TRADITIONAL HOB
2 BURNERS AND SIMMER PLATE

- 1 cast iron simmer plate over 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems


Ovens:	interior dimensions (mm)
Static oven:	W 530 x H 305 x D 455
Convection elec. oven:	W 530 x H 305 x D 405

1 x 4 kW gas oven.
1 x 3.1 kW static elec. oven with grill.
1 x 3.4 kW convection elec. oven with grill.
Optional extra:
Simmer oven (see description p.29).

Reference
LG 1531 G
LG 1531 E
LG 1531 CT
ETL 001


Reference
LCF 1531 G
LCF 1531 E
LCF 1531 CT
ETL 001

30% deposit to be paid on order registration.
This appliance can neither be returned nor exchanged.

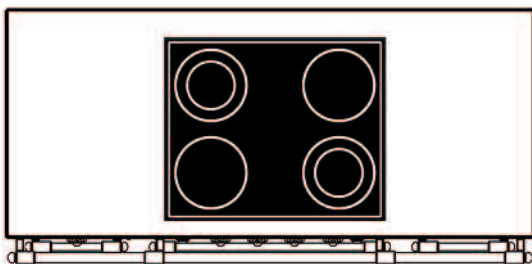

RADIANT HOB
4 RINGS

- Vitroceramic hob
- 2 x 2100 W rings Ø 210 mm
- 2 x double rings Ø 140/210, 1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

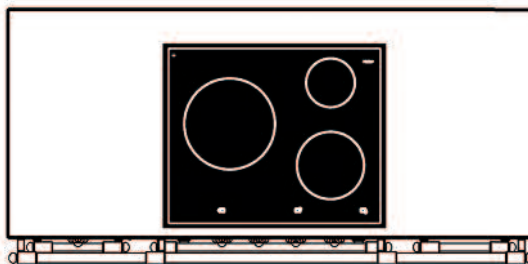


INDUCTION HOB
3 RINGS

- Vitroceramic hob, induction rings
- 1 ring Ø 145 mm of 1400 W, booster 1800 W
- 1 ring Ø 200 mm of 1850 W, booster 1800 W
- 1 ring Ø 270 mm of 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator


Any of the hob options illustrated below may be integrated (as optional extra) on the left hand side or right hand side of the hob.



1 x 5 kW
burner



2 x 3 kW
burners



2 x 4 kW
burners




2 radiant rings,
1 x Ø 210 mm
@ 2100 W, 1
Ø 140/210 mm
@ 1000/2100 W

LAG 010 UR


LAG 020 R

LAG 024 R


LAE 020 VTR (2)




2 induction rings
1 x Ø 145 mm
@ 1400 W,
booster 1800 W,
1 x Ø 200 mm
@ 1850 W,
booster 2500 W



Electric plancha
2.2 kW



Electric griddle
3.5 kW



Gas-grill
4 kW

LAE 020 I (2)


LAE 010 TPK

LAE 010 GE

LAG 010 CKG



Multi cooker
Steamer
Pasta Boiler
Bain Marie
3.5 kW



Electric fryer
6 L - 3.3 kW

LAE 010 CV (3) (4) LAE 413 FR (3)

Reference

LVTR 1541 E (1)

LVTR 1541 CT (1)

ETL 001

Reference

LVI 1531 E (1)

LVI 1531 CT (1)


ETL 001

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code: LAC 230 V).

(2) Cannot be fitted next to simmer plate.


(3) Cannot be fitted over simmer oven.

(4) Requires water supply and connection to waste.

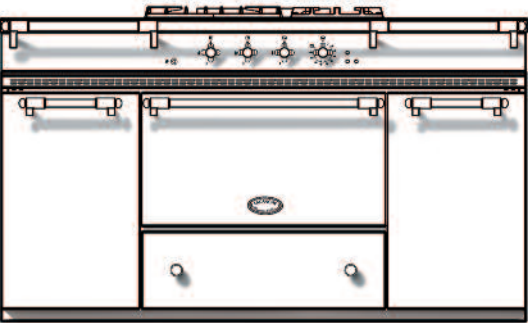


W 1505 x H 860 x D 650 mm **CE**

- **Standard finish:**
 - Black enamel
 - Trim: brass
- **Options:**
 - Enamelled colours and stainless steel: LOC 1500
 - Trim: chrome (LFC), nickel (LFN) and brushed stainless steel (LFS)
 - Stainless steel plinth (increases height to 900/910 mm): LRH 1501

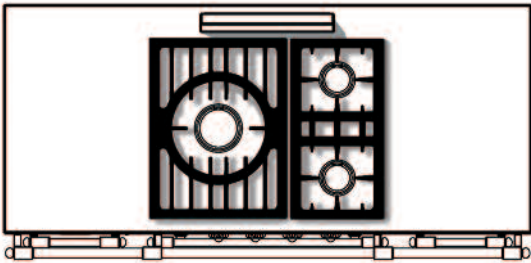

CLASSIC HOB
3 BURNERS

- 1 x 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

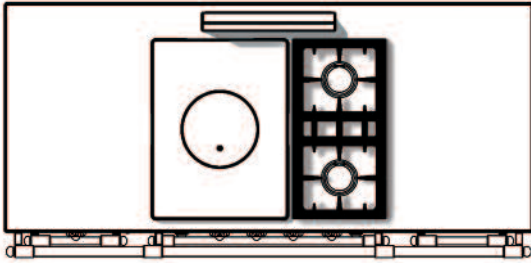

TRADITIONAL HOB
2 BURNERS AND SIMMER PLATE

- 1 cast iron simmer plate over 5 kW burner
- 1 x 3 kW burner
- 1 x 1.5 kW burner
- Electric ignition and flame failure safety systems

Ovens:	interior dimensions (mm)
Static oven:	W 530 x H 305 x D 455
Convection elec. oven:	W 530 x H 305 x D 405
Vertical conv. elec. oven:	W 305 x H 400 x D 405

1 x 4 kW gas oven and 1 x 2.65 kW (vertical) convection elec. oven with grill (on left hand side).

1 x 3.1 kW static elec. oven with grill and 1 x 2.65 kW (vertical) convection elec. oven with grill (on left hand side).

1 x 3.4 kW convection elec. oven with grill and 1 x 2.65 kW (vertical) convection elec. oven with grill (on left hand side).

Optional extra (on right hand side only):

Simmer oven (see description p.29).

Reference

LG 1532 G

LG 1532 E

LG 1532 CT

ETL 001

Reference


LCF 1532 G

LCF 1532 E

LCF 1532 CT

ETL 001

30% deposit to be paid on order registration.
This appliance can neither be returned nor exchanged.

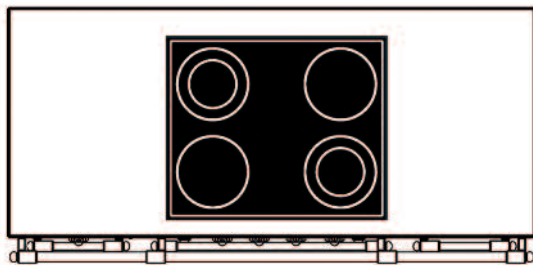

RADIANT HOB
4 RINGS


- Vitroceramic hob
- 2 x 2100 W rings Ø 210 mm
- 2 x double rings Ø 140/210, 1000 / 2100 W
- Rotating control power switch
- Residual heat indicator

Reference

LVTR 1542 E (1)

LVTR 1542 CT (1)

ETL 001

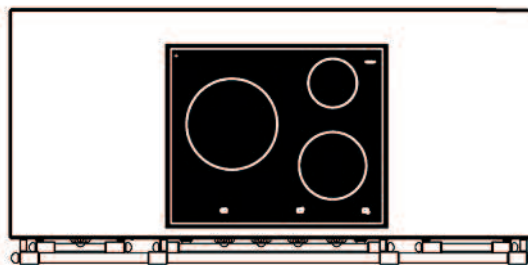

INDUCTION HOB
3 RINGS

- Vitroceramic hob, induction rings
- 1 ring Ø 145 mm of 1400 W, booster 1800 W
- 1 ring Ø 200 mm of 1850 W, booster 1800 W
- 1 ring Ø 270 mm of 2400 W, booster 3300 W
- Rotating control power switch
- Residual heat indicator

Reference

LVI 1532 E (1)

LVI 1532 CT (1)


ETL 001

Any of the hob options illustrated below may be integrated (as optional extra) on left hand side or right hand side of the hob.




1 x 5 kW
burner

LAG 010 UR



2 x 3 kW
burners

LAG 020 R




2 x 4 kW
burners

LAG 024 R




2 radiant rings,
1 x Ø 210 mm
@ 2100 W, 1
Ø 140/210 mm
@ 1000/2100 W

LAE 020 VTR (2)




2 induction rings
1 x Ø 145 mm
@ 1400 W,
booster 1800 W,
1 x Ø 200 mm
@ 1850 W,
booster 2500 W

LAE 020 I (2)




Electric plancha
2.2 kW

LAE 010 TPK



Electric griddle
3.5 kW

LAE 010 GE (4)




Gas-grill
4 kW

LAG 010 CKG (4)



Multi cooker
Steamer
Pasta Boiler
Bain Marie
3.5 kW

LAE 010 CV (3) (5)



Electric fryer
6 L - 3.3 kW

LAE 413 FR (3)

(1) Voltage: 400 V 3N + T~50 Hz. as standard or double 230 V single phase 50 Hz. (Code: LAC 230 V).


(2) Cannot be fitted next to simmer plate.

(3) Cannot be fitted over vertical convection oven or simmer oven.

(4) Cannot be fitted over vertical convection oven.

(5) Requires water supply and connection to waste.


ACCESSORIES & OPTIONAL EQUIPMENT

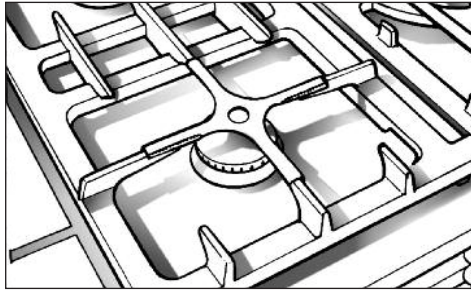

TRIVET.

To go above 1.5 kW, 3 kW and 4 kW burners to allow the use of small pans.


Ref.: LRG

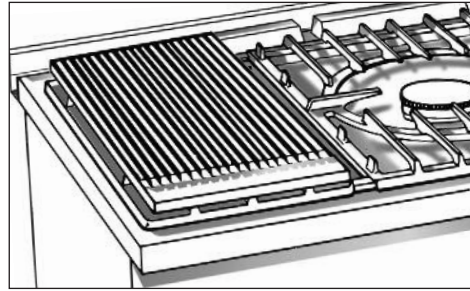

GRIDDLE PLATE.

Enamelled cast iron ridged griddle plate which sits over two burner pan stand set; it is perfect for searing and then cooking through meats with the minimum of added fats. The optimal heat for searing or cooking through can be obtained simultaneously on both ends of the plate by adjusting each of the two burners accordingly. Dimensions: 510 x 260 mm.


Ref.: GRL

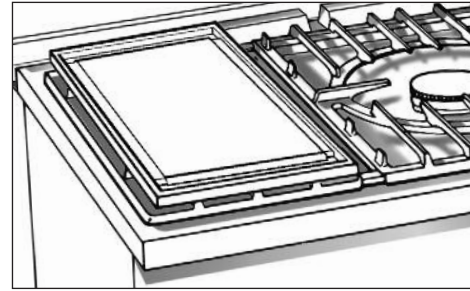

PLANCHA.

Enamelled cast iron plate which sits over two burner set pan stand; it is ideal for English breakfasts, fried eggs, Welsh cakes etc. By adjusting each of the two burners, it is easy to fine-tune the heat of this sizeable plate. Dimensions: 500 x 210 mm.


Ref.: GSL

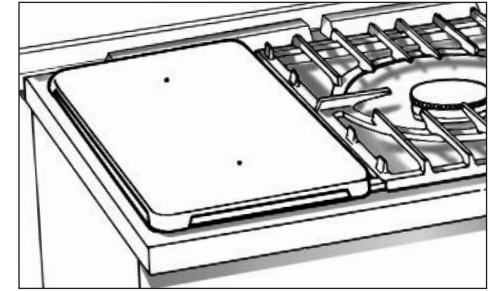

SIMMER PLATE.

This enamelled cast iron plate sits over a pair of gas burners in place of the pan support. It provides a gentle, constant heat that can be easily adjusted by changing the pan's position. Ideally suited for sauces and for keeping cooked food warm. Dimensions: 510 x 260 mm.


Ref.: PML

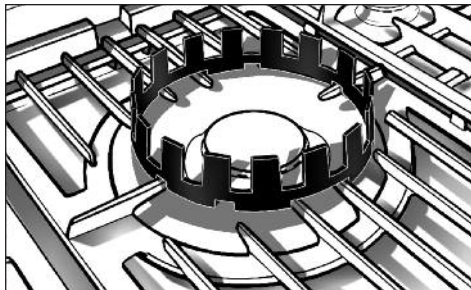

WOK RING.

For supporting cookware with spherical bases. This accessory made of enamelled cast iron, supports wok bowl or similar utensils. It can sit over all gas burners (Classic traditional hobs).


Ref.: LWK

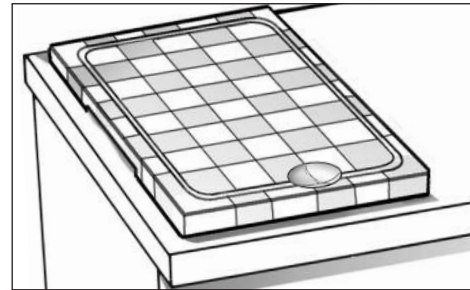

END-GRAIN CHOPPING BOARD.

This board fits over the Multi cooker when not in use.


Ref.: LPB

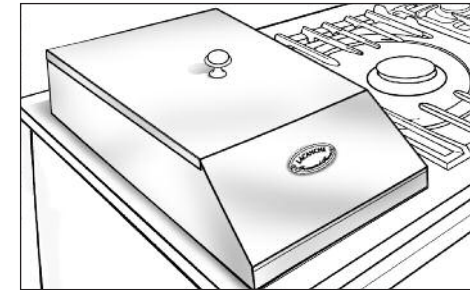

ELECTRIC FRYER LID WITH SPLASH GUARD.

This lid improves the overall look of your cooker when the fryer is not in use.


Ref.: LFC

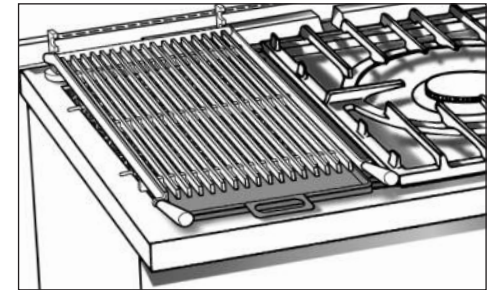

CHARGRILL ACCESSORIES.

For using gas grill as chargrill. This set of accessories includes 1 stainless steel griddle, 1 lavastones support, and lavastones.

Ref.: LCKG

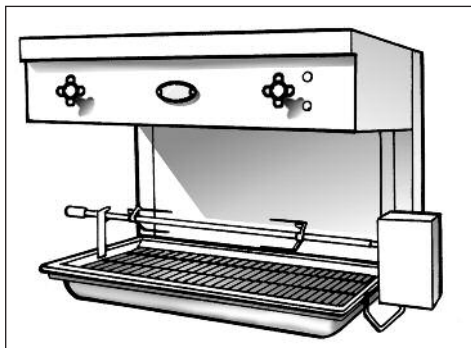

SALAMANDER - ELECTRIC GRILL.

For grilling and roasting meats and fish, nothing comes close to the convenience and performance of the salamander. This is also true for the browning of gratins or desserts: the salamander is second to none for turning out perfect 'crèmes brûlées', topped with the traditional caramelised sugar crust.

The electric revolving spit makes grilling and roasting in the genuine French tradition a breeze.

The salamander is wall-mounted. It is available in stainless steel, black or in a choice of enamelled colours.

- Salamander electric grill with wall-mounting bracket.
- Nominal power: 3 kW.
- Power supply: 230/240 V.
- Integrated timer (0 -120 minutes).
- Adjustable 3 kW heating element with removable heat protection for cleaning.
- Power supply cable included (without plug).
- Wall-mounting bracket included.
- Adjustable rack (4 different heights) for 1/1 'Gastronorm', sized dishes.

- A 60 mm deep 1/1 'Gastronorm' pan and a grill insert are supplied with the salamander.


- Dimensions (mm):
W550 x H 475 x D 500.

Ref.: LSE 610

- Revolving spit with rack-mounted stand.
- The electric spit is supplied with standard power cable and plug.
- Supplied with adjustable forks for securing joints in place.


Ref.: LTB 610

SIMMER OVEN.

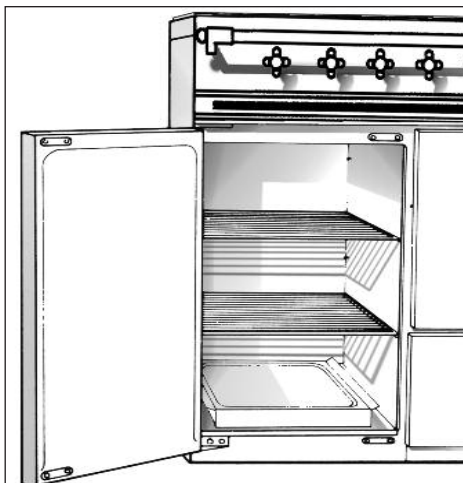

Our cupboards, providing they are not under a fryer or a multi cooker, can be specified as simmer ovens. These 84 liter ovens can be used for pre-heating dishes, slow cooking and keeping cooked food warm (internal dimensions: W325 x H495 x D530 mm).

Ref.: ETL 001

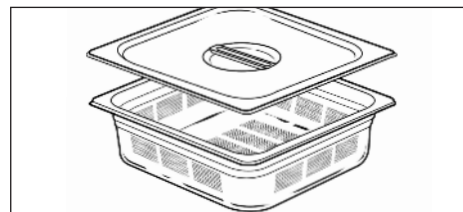

PERFORATED GASTRO CONTAINERS WITH LID.

(for multi cooker - steaming)

These are for use in steaming food. They are available in two sizes and can be used in two combinations :
1 x GN 2/3 - H.100 or 2 x GN 1/3 - H.100

Ref.: BPGN 2/3 - H 100 - Cap: 8.7 Litres

Dim : 354 x 325 mm.

Ref.: BPGN 1/3 - H 100 - Cap: 3.7 Litres

Dim : 325 x 176 mm.

GASTRO CONTAINERS WITH LID.

(for multi cooker - Bain Marie)

These are used as Bain Marie.

Choose a combination to suit your requirements.

Ref.: BGN 1/6 - H 100 - Cap: 1.7 Litres

Dim : 176 x 162 mm.

Ref.: BGN 1/3 - H 100 - Cap: 3.7 Litres


Dim : 325 x 176 mm.

Ref.: BGN 2/3 - H 100 - Cap: 8.7 Litres

Dim : 354 x 325 mm.

GRIDDLE SCRAPER.

Supplied with 3 x smooth scraping blades and 3 x ridged scraping blades (to match griddle plates).

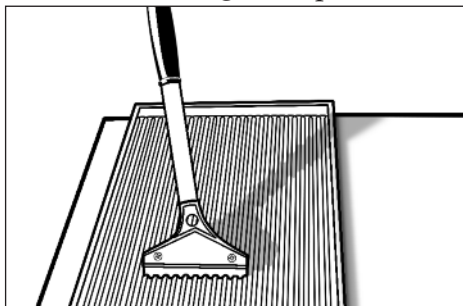

Ref.: RAC

PASTA BASKETS.

(for multi cooker - pasta boiling)

These permit vegetables and pasta to be cooked in the multi cooker.

Easy to handle, these perforated baskets allow water to drain. They are available in three sizes, which allow up to three different preparations to be cooked at the same time.


4 combinations exist:

- 1 x LPP 1
- 2 x LPP 2
- 4 x LPP 4
- 1 x LPP 2 and 2 x LPP 4

Ref.: LPP 1


Ref.: LPP 2

Ref.: LPP 4

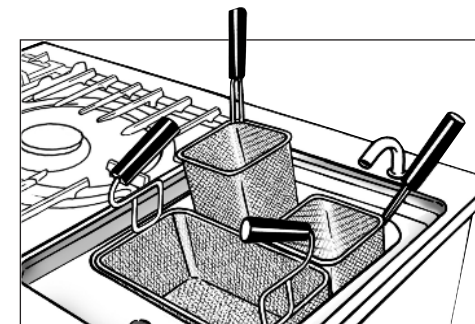

ACCESSORIES

BACK STRIP

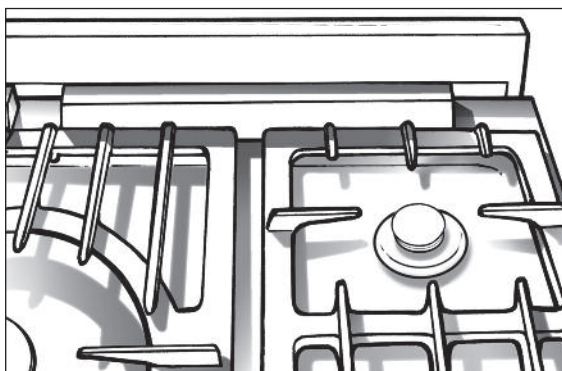


With the back strip in place, a 70 mm space remains between the range and the wall. The overall depth of the appliance (rail not included) then reaches 720 mm (an increase of 70 mm). The back strip prevents excessive heat transfer to the wall and makes cleaning easier. It is especially recommended for all ranges equipped with gas ovens or those with tiles on the wall above the cooker.


Stove models	Reference
Cormatin	DS 700
Cluny-Chagny-Vougeot-Volnay	DS 1000
Chassagne-Chambertin	DS 1100
Saulieu-Savigny	DS 1100
Cluny 1400-Sully	DS 1400
Fontenay-Cîteaux	DS 1500
Cluny 1800	DS 1800

STAINLESS STEEL BACKSPLASH WITH UTENSIL RAIL.

LCR: height 720 mm.
LCH: for range + hood combination
(full details on page 31).

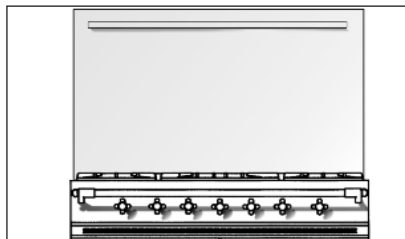

Length in mm	Reference	Reference
700	LCR 700	LCH 700
1000	LCR 1000	LCH 1000
1100	LCR 1100	LCH 1100
1400	LCR 1400	LCH 1400
1500	LCR 1500	LCH 1500
1800	LCR 1800	LCH 1800




Flexible 'Tubogaz' gas connecting system: this universal, highly flexible connecting system has been developed for heavy-duty professional use. It is based on a PVC tube protected by a fire-proof sheath of braided stainless steel.


Ref.	RS 100	RS 150	RS 200
Length	1 m	1,50 m	2 m

AVAILABLE OVEN ACCESSORIES.


Oven rack



Pastry plate




Roasting dish



	Ref		Ref.		Ref.	
Simmer oven	GF 530					
Oven (530 x 405/455) - Cormatin - Volnay-Vougeot - Chambertin-Chassagne - Saulieu-Savigny-Sully - Fontenay-Cîteaux	GFD 530		TP 530		PR 530	
Vertical oven (305 x 405) - Saulieu-Savigny - Cîteaux	GF 029		TP 029			
Oven (400 x 405/455) - Cluny-Chagny	GFD 040		TP 036		PR 040	

EXTRACTION

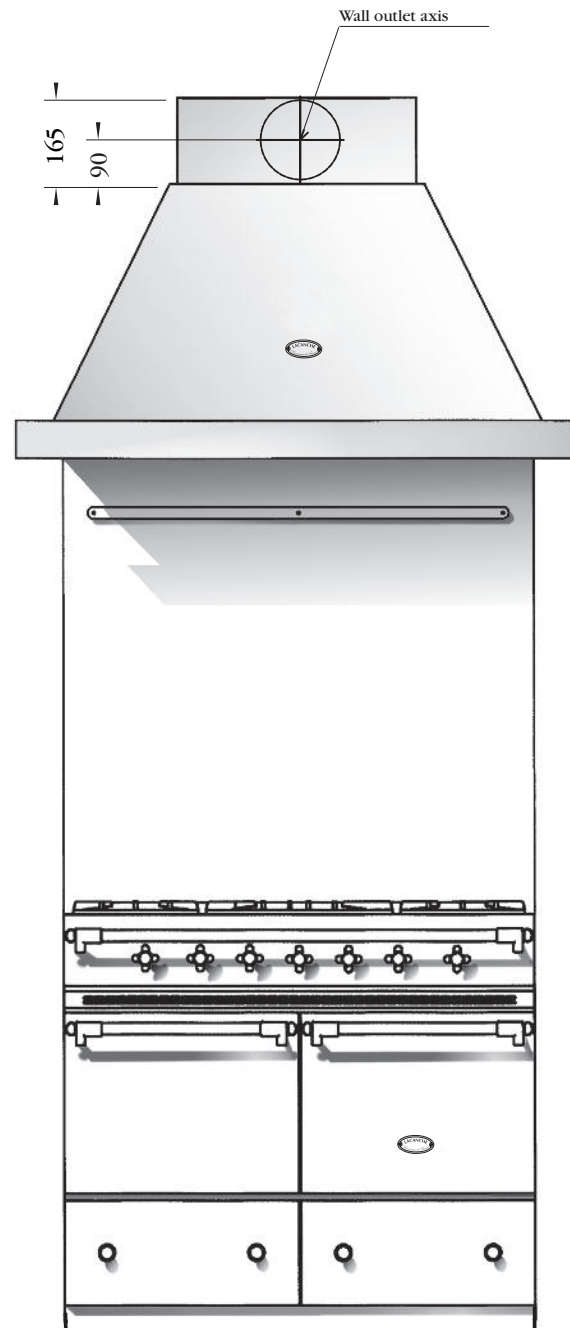


Lacanche extraction hoods have been developed to provide powerful and efficient extraction. Two options are offered.

- Hood, dishwashable filters, lights, with integrated extraction unit.
- Hood, dishwashable filters, lights, with independent fan units.


Integrated and independent fan units are low noise levels and particularly efficient.

- Controls: 3 speed motor control.
- Lights.
- Voltage: 230 V single phase.
- **Standard finish:**
 - Canopy: black.
 - Bottom frame: Stainless Steel.
- **Optional colour finish:**
 - for canopy with extra cost (ref: LOCH).
- The upper section of the hood can be adjusted from 0 to 70 mm.

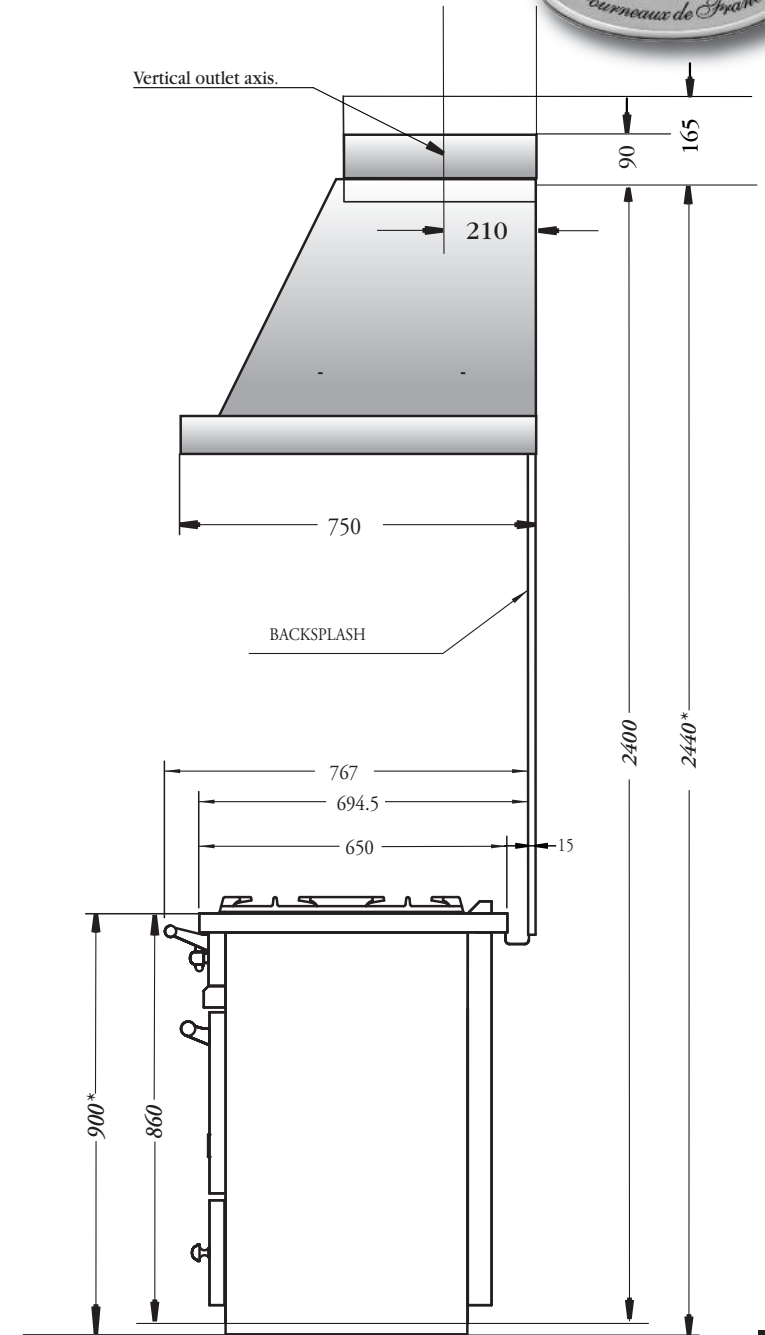


**Only for Chagny model*

Extraction types.

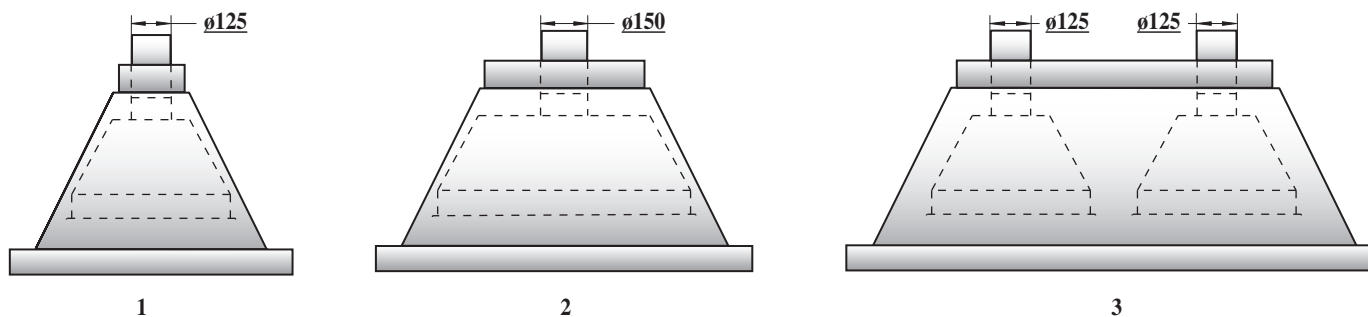

Hood, filter and integrated fan units. Integral safety glass ceiling, lighting, 3 speed power switch.	Cooker's type width	700	1000	1100	1400	1500	1800
	Code	LHM 900	LHM 1200	LHM 1300	LHM 1600	LHM 1700	LHM 2000
	Duct diameter (mm)	125	150	150	150	2 x 125	2 x 125
	Extraction type	1	2	2	2	3	3
	Extraction rate (m³/h)	1 600	2 1200	2 1200	2 1200	2 1200	2 1200
	Dimensions	L 900 P 750	L 1200 P 750	L 1300 P 750	L 1600 P 750	L 1700 P 750	L 2000 P 750
	Upper section width (mm)	208	508	608	908	1008	1308

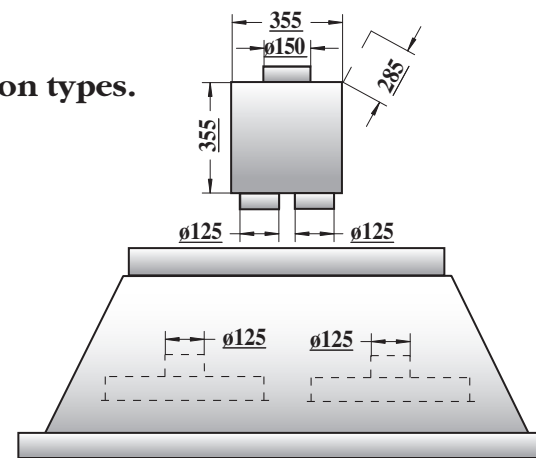

4

5

	Cooker's type width	1000	1100	1400	1500	1800
Hood, filter and independent fan units. Integral safety glass ceiling, lighting, 3 speed power switch.	Code	LHM 1200 D	LHM 1300 D	LHM 1600 D	LHM 1700 D	LHM 2000 D
	Ducting diameter to independent fan units (mm)	2 x 125	2 x 125	2 x 125	2 x 125	2 x 125
	Ducting diameter to exit (mm)	150	150	150	150	150
	Extraction type	4	4	4	5	5
	Extraction rate (m³h)	2 1200	2 1200	2 1200	2 1200	2 1200
	Dimensions	L 1200 P 750	L 1300 P 750	L 1600 P 750	L 1700 P 750	L 2000 P 750
	Upper section width (mm)	508	608	908	1008	1308